
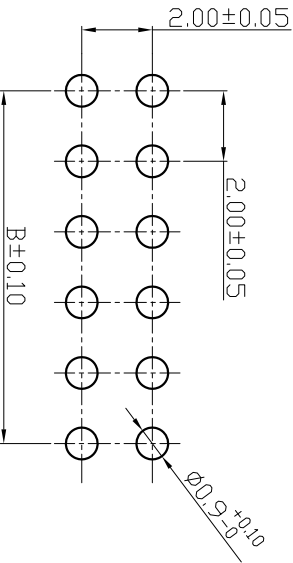
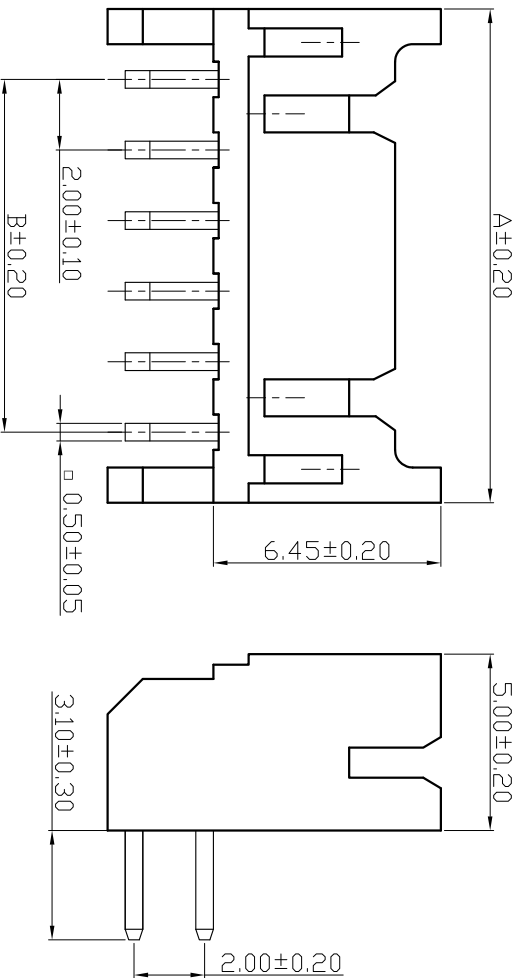


REV	ECN No.	DESCRIPTION	DATE
A	ECN.	RELEASE	2011-11-16

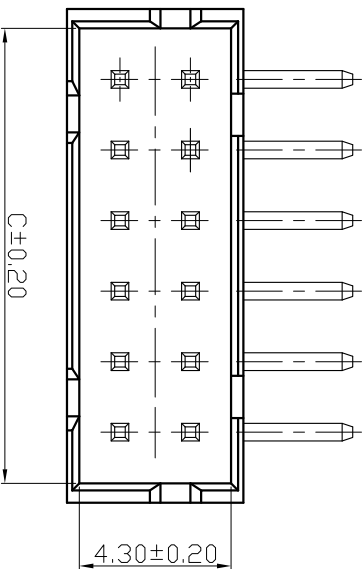

PCB Layout

备注:

- 电气性能:
 - 1-1. 额定电流: 2.0A
 - 1-2. 额定电压: 150V
 - 1-3. 耐电压: 500V
 - 1-4. 接触电阻: 30mΩ
 - 1-5. 绝缘电阻: 500MΩ
- 工作温度: -25℃~+85℃
- 环境管控:
- 3-1. 禁止使用含有SS-00259所限制的物质。
- 3-2. 对应第三方检测机构出具的ICP-AES数据和不可测定物质的成分表, 在一年有效期内。

孔数	A	B	C
6	8.00	4.00	6.90
8	10.00	6.00	8.90
10	12.00	8.00	10.90
12	14.00	10.00	12.90
14	16.00	12.00	14.90
16	18.00	14.00	16.90
18	20.00	16.00	18.90
20	22.00	18.00	20.90
22	24.00	20.00	22.90
24	26.00	22.00	24.90
26	28.00	24.00	26.90
28	30.00	26.00	28.90
30	32.00	28.00	30.90

2	CONTACT	n PCS	COPPER ALLOY	Ni:30u"~100u",Sn:80u"~200u"
1	HOUSING	1 PCS	THERMOPLASTIC	UL 94V-0,COLOR:NATURE
ITEM	COMPONENT	QTY	MATERIAL	FINISH
深圳市德全盛电子科技有限公司 SHENZHEN CITY DEQUANGSHENG ELECTRONIC TECHNOLOGY CO.,LTD.				
TITLE: ASSEMBLY BAR-CONNECTOR				
X.±0.5	X.±0.5"	USE:	CUSTOMER	PART NO.:
X.±0.3	X.±0.3"	APPD:	YAHVEH	PHD-NAWD
.XX±0.2	.XX±0.2"	CHKD:	YEWENUV	DWG NO.:
--	--	DR:	CUIRONG	SCALE 1:1
UNITS: mm				SHEET 1/1